

Power Saving, Easy Installation No maintenance

- Long life (> 25000 hrs)
- “Part separation” design, no maintenance
- High color rendering
- Low power dissipation
- Good heat dissipation structure
- No flash and UV
- Environmentally-friendly




LED TUBE (C TYPE)

Saving you >35% Energy

► Specification

Model No.	CDY-TUC-014-A	CDY-TUC-028-A
Power supply	AC 85V ~ AC 265V	
Power factor	>0.8	
Power Consumption (W)	15±1.5	30±2
Color temperature	Warm white 2600~3200K, Cool white: 5300~7000K	
Luminous Flux (lm)	Cool white:540±10%	Cool white:1000±10%
	Warm white: 420±10%	Warm white: 800±10%
Socket for the lamp	G13	
View angle	110°	
L(below)	605 mm	1205 mm

► Dimension

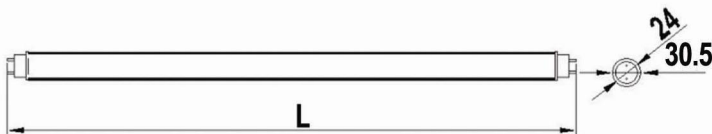

Application: Indoor lighting

Add: 502-A, Chaney Street, Lake Elsinore, Ca. 92530

Tel: 1-877-224-5678



Power Saving, Easy Installation No maintenance



- Long life (> 25000 hrs)
- “Part separation” design, no maintenance
- High color rendering
- Low power dissipation
- Good heat dissipation structure
- No flash and UV
- Environmentally-friendly


LED TUBE (S TYPE)

Saving you >35% Energy

► Specification

Model No.	CDY-TUS-010-A	CDY-TUS-020-A
Power supply	AC 85V ~ AC 265V	
Power factor	>0.8	
Power Consumption (W)	13±1	26±2
Color temperature	Warm white 2600~3200K, Cool white: 5300~7000K	
Luminous Flux (lm)	Cool white: 560±10%	Cool white: 1200±10%
	Warm white: 600±10%	Warm white: 1300±10%
Socket for the lamp	G13	
View angle	120°	
L(below)	605 mm	1205 mm

► Dimension

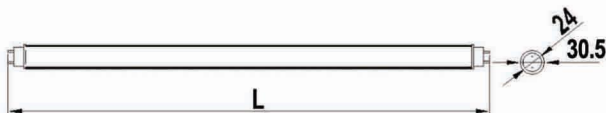

Application: Indoor lighting

Add: 502-A, Chaney Street, Lake Elsinore, Ca. 92530

Tel: 1-877-224-5678